

CAT. No.

81641x1.5M

EUROPEAN CEE 7/7 SCHUKO 10 AMPERE 230-250 VOLT DETACHABLE POWER CORD, (EU1-16P)  
 DIN 49441 ANGLED PLUG, IEC 60320 C-13 STRAIGHT CONNECTOR, 2 POLE-3 WIRE GROUNDING,  
 1.5 METERS (4FT.-11IN.) LONG. BLACK.


APPROVALS	CEBEC <input checked="" type="checkbox"/>	KEMA <input checked="" type="checkbox"/>	NEMKO <input checked="" type="checkbox"/>	OVE <input checked="" type="checkbox"/>	SEMKO <input checked="" type="checkbox"/>	VDE <input checked="" type="checkbox"/>
CERTIFICATIONS	CE <input checked="" type="checkbox"/>	ROHS <input checked="" type="checkbox"/>	REACH <input checked="" type="checkbox"/>			
STANDARDS	CEE 7/7 <input checked="" type="checkbox"/>	IEC 60320 <input checked="" type="checkbox"/>	DIN 49441 <input checked="" type="checkbox"/>			

RELATED POWER CORDS

<u>CATALOG No</u>	<u>LENGTH</u>
81641x3FT	36 INCHES
81641x6FT	72 INCHES
81641x10FT	120 INCHES
81641x15FT	180 INCHES
81641x20FT	240 INCHES
81641x1M	1 METER
81641x1.5M	1.5 METERS
81641x3M	3 METERS
81641	2.5 METERS
81641-RA	2.5 METERS
81641-LA	2.5 METERS
81641-S	2.5 METERS

**SPECIFICATIONS:**

1. OVERALL LENGTH: 1.5 METERS (4FT.-11IN.)
2. CONDUCTORS: 1.0 MM x 3 (BROWN/BLUE/GREEN-YELLOW)
3. JACKET: H05VV-F, BLACK
4. PLUG: CEE 7/7 ANGLED "SCHUKO", BLACK, DIN 49441
5. CONNECTOR: IEC 60320 C-13, STRAIGHT, BLACK
6. RATED: 10 AMPERE 250 VOLT
7. TEMPERATURE RATING: 70°C
8. CABLE DIAMETER (APPROX.): 7.0 mm
9. GENERAL MATERIAL: PVC
10. STRANDING (APPROX.): 32/0.2 mm
11. OPERATING TEMPERATURE: -15°C TO +70°C

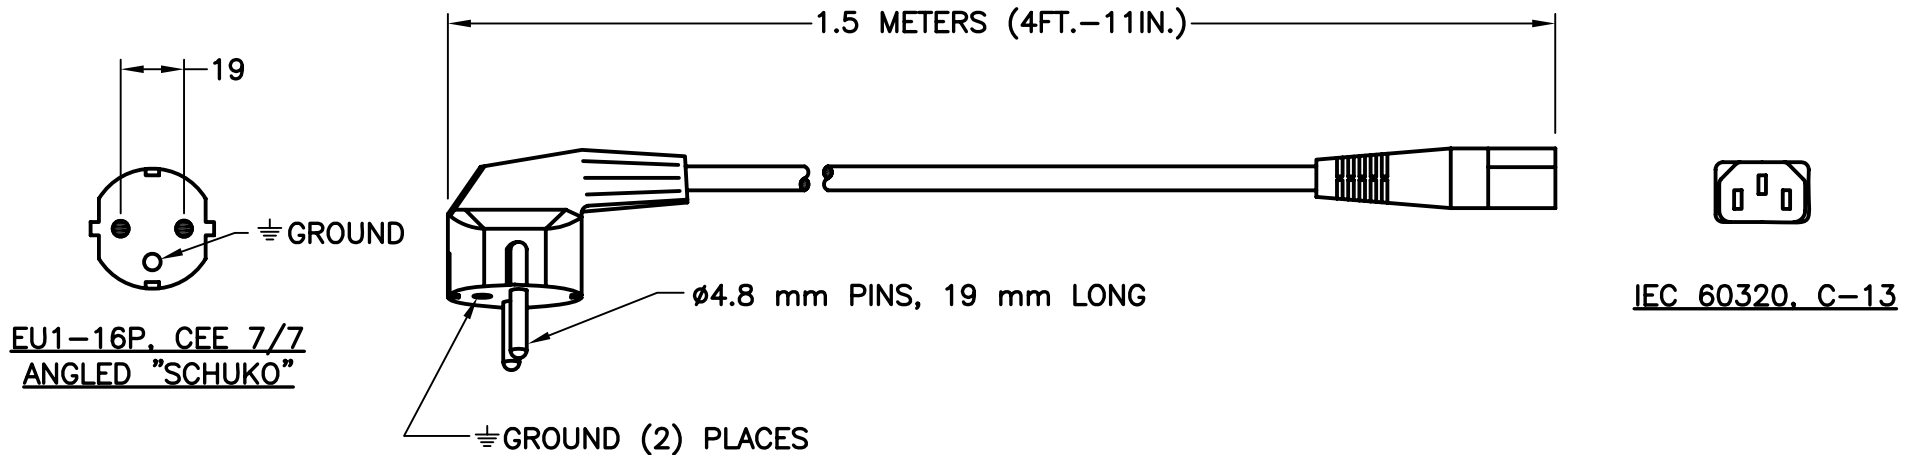

EU1-16P, CEE 7/7  
ANGLED "SCHUKO"