

CAT. No.


83900-SA

SAUDI ARABIA, UNITED KINGDOM, HONG KONG, SINGAPORE, MALAYSIA 2.5 AMPERE 250 VOLT DETACHABLE POWER CORD, BS 1363A TYPE G PLUG (SA1-13P, UK1-13P), 3 AMPERE BS 1362 FUSE, IEC 60320 C-7 CONNECTOR, 2 POLE-2 WIRE GROUNDING, 1.8 METERS (6 FEET) LONG. BLACK.


|                |   |  |  |   |   |   |
|----------------|---|--|--|---|---|---|
| APPROVALS      | SASO 2203/2815 (SAUDI ARABIA) <input type="checkbox"/>            | ASTA (UNITED KINGDOM) <input type="checkbox"/>                     | HKSI (HONG KONG) <input checked="" type="checkbox"/> | PSB (SINGAPORE) <input checked="" type="checkbox"/> | MS (MALAYSIA) <input checked="" type="checkbox"/> | ENEC 10 (VDE) <input checked="" type="checkbox"/> |
| CERTIFICATIONS | SASO 2203/2815 (SAUDI ARABIA) <input checked="" type="checkbox"/> | ASTA BS 1363A (UNITED KINGDOM) <input checked="" type="checkbox"/> | HKSI (HONG KONG) <input checked="" type="checkbox"/> | PSB (SINGAPORE) <input checked="" type="checkbox"/> | MS (MALAYSIA) <input checked="" type="checkbox"/> |   |
|                | IEC 60320 C-13 <input checked="" type="checkbox"/>                | REACH <input checked="" type="checkbox"/>                          | ROHS <input checked="" type="checkbox"/>             | ROHS2 <input checked="" type="checkbox"/>           |   |   |
| STANDARDS      | SASO 2203/2815 (SAUDI ARABIA) <input checked="" type="checkbox"/> | BS 1363A (UNITED KINGDOM) <input checked="" type="checkbox"/>      | HKSI (HONG KONG) <input checked="" type="checkbox"/> | PSB (SINGAPORE) <input checked="" type="checkbox"/> | MS (MALAYSIA) <input checked="" type="checkbox"/> |   |

**SPECIFICATIONS:**

- 1. OVERALL LENGTH: 1.8 METERS (6 FEET)
- 2. CONDUCTORS: 0.75 mm<sup>2</sup> x 3 WITH IEC COLOR CODE (GREEN/YELLOW, BLUE, BROWN)
- 3. JACKET: H03VVH2-F, BLACK
- 4. PLUG: SASO 2203, 3 AMPERE FUSED, ANGLE, BLACK
- 5. CONNECTOR: IEC 60320 C-7, STRAIGHT, BLACK
- 6. RATED: 2.5 AMPERE 250 VOLT

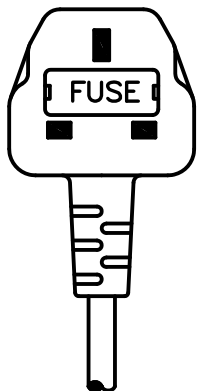

SA1-13P  
SASO 2203

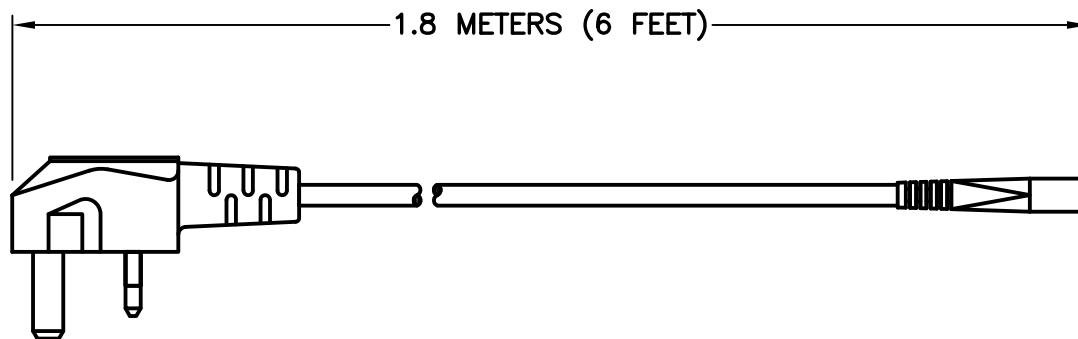

IEC 60320 C-7